
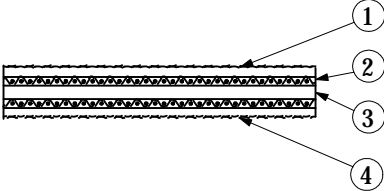


<p>Technical Data Sheet</p>	<p>PolyBelt MA-500</p>	<p>NITTA CORP. </p>	
<p>Construction</p>		<p>No.</p>	<p>Material</p> <ol style="list-style-type: none"> 1 NBR(Textured Pattern, Blue) 2 Polyamide Fabric 3 Polyamide Film 4 NBR(Textured Pattern, Blue)
<p>Item</p>	<p>Description</p>	<p>Measuring Conditions</p>	
<p>Anti-Static Property</p>	<p>Yes</p>		
<p>Dimensions</p> <p>Thickness Width Length</p>	<p>2.50mm 5 ~ 300mm 300 ~ 100,000mm</p>		
<p>Joint Description</p>	<p>Skived joint Adhesive Polybond A and E</p>		
<p>Physical Properties</p> <p>Tensile Strength Elongation at Break Standard Elongation Shaft load at e= 2% Minimum Pulley Diameter Efficiency of Joint Service Temperature Range Coefficient of Friction Mass</p>	<p>150N/mm W 20% 2% 15.0N/mm W 35mm Approx. 80% - 20 ~ +80°C 0.5 ~ 0.6 (Blue) 0.5 ~ 0.6 (Blue) 2.7kg/m²</p>		<p>Test Speed 50 mm/min Ambient condition 20°C×60%</p> <p>Measured on a Steel Plate Measured on a Steel Plate</p>
<p>Features and Main Applications</p>			
<p>Remarks</p>			