
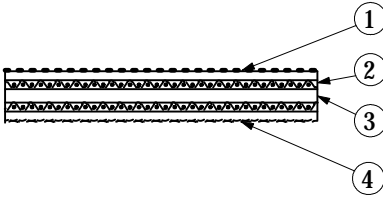


<p>Technical Data Sheet</p>	<p>PolyBelt TFM-10S</p>	<p>NITTA CORP. </p>	
<p>Construction</p>		<p>No.</p>	<p>Material</p> <p>1 NBR(Taffeta Structured, Dark Blue) 2 Polyamide Fabric 3 Polyamide Film 4 NBR(Textured Pattern, Gray)</p>
<p>Item</p>	<p>Description</p>	<p>Measuring Conditions</p>	
<p>Anti-Static Property</p>	<p>Yes</p>		
<p>Dimensions Thickness Width Length</p>	<p>3.20mm 10 ~ 300mm 300 ~ 100,000mm</p>		
<p>Joint Description</p>	<p>Skived joint Adhesive Polybond A and E</p>		
<p>Physical Properties Tensile Strength Elongation at Break Standard Elongation Shaft load at e= 2% Minimum Pulley Diameter Efficiency of Joint Service Temperature Range Coefficient of Friction Mass</p>	<p>390N/mm W 20% 2% 39.0N/mm W 70mm Approx. 80% - 20 ~ +80°C 0.5 ~ 0.6 (Dark Blue) 0.5 ~ 0.6 (Gray) 3.5kg/m²</p>		<p>Test Speed 50 mm/min Ambient condition 20°C×60% Measured on a Steel Plate Measured on a Steel Plate</p>
<p>Features and Main Applications</p>			
<p>Remarks</p>			