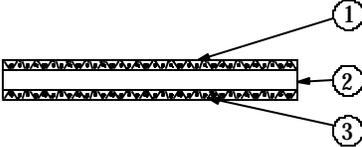


Technical Data Sheet	PolyBelt TTA-1000	NITTA CORP. 	
Construction		No.	Material
Item	Description	Measuring Conditions	
Anti-Static Property	No		
Dimensions Thickness Width Length	1.80mm 10 ~ 300mm 300 ~ 100,00mm		
Joint Description	Skived joint Adhesive Polybond A		
Physical Properties Tensile Strength Elongation at Break Standard Elongation Shaft load at e= 1% Minimum Pulley Diameter Efficiency of Joint Service Temperature Range Coefficient of Friction Mass	300N/mm W 20% 1% 15.0N/mm W 60mm Approx. 80% 0 ~ +80°C 0.2 ~ 0.25 (Blue) 0.2 ~ 0.25 (Blue) 1.7kg/m ²	Test Speed 50 mm/min Ambient condition 20°Cx60% Measured on a Steel Plate Measured on a Steel Plate	
Features and Main Applications	Both sides are covered by low friction coefficient fabrics A belt for accumulation conveyer Both side fabrics are Non-fray treated		
Remarks			