
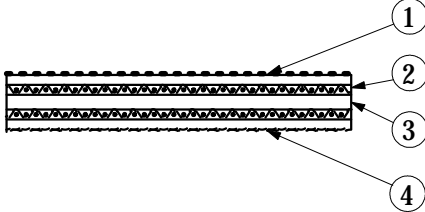


<p>Technical Data Sheet</p>	<p>PolyBelt XHTA-1000-6</p>	<p>NITTA CORP. </p>										
<p>Construction</p>		<table border="1"> <thead> <tr> <th>No.</th> <th>Material</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>NBR(Textured Pattern, Blue)</td> </tr> <tr> <td>2</td> <td>Polyamide Fabric</td> </tr> <tr> <td>3</td> <td>Polyamide Film</td> </tr> <tr> <td>4</td> <td>Polyamide Fabric(Blue)</td> </tr> </tbody> </table>	No.	Material	1	NBR(Textured Pattern, Blue)	2	Polyamide Fabric	3	Polyamide Film	4	Polyamide Fabric(Blue)
No.	Material											
1	NBR(Textured Pattern, Blue)											
2	Polyamide Fabric											
3	Polyamide Film											
4	Polyamide Fabric(Blue)											
<p>Item</p>	<p>Description</p>	<p>Measuring Conditions</p>										
<p>Anti-Static Property</p>	<p>Yes</p>											
<p>Dimensions Thickness Width Length</p>	<p>6.0 mm 5 ~ 300mm 300 ~ 100,000mm</p>											
<p>Joint Description</p>	<p>Skived joint Adhesive Polybond A and E</p>											
<p>Physical Properties Tensile Strength Elongation at Break Standard Elongation Shaft load at e= 1% Minimum Pulley Diameter Efficiency of Joint Service Temperature Range Coefficient of Friction Mass</p>	<p>300N/mm W 20% 1% 15N/mm W 80mm Approx. 80% 0 ~ +80°C 0.5 ~ 0.6 (Rubber) 0.2 ~ 0.3 (Fabric) 6.3kg/m²</p>	<p>Test Speed 50 mm/min Ambient condition 20°C×60% Measured on a Steel Plate Measured on a Steel Plate</p>										
<p>Features and Main Applications</p>												
<p>Remarks</p>												